



Effective August 1, 2016
Supersedes all previous information. Subject to change without notice




Lyon Station, PA 19536 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-4231

www.dekabatteries.com

Table with columns: GROUP NO., PART NO., PERFORMANCE LEVEL (CCA, R.C., REF. CA, 20HR CAP), WEIGHT (lb), MAXIMUM OVERALL DIMENSIONS (LENGTH, WIDTH, HEIGHT), Core Value, WARRANTY (FREE MONTHS), FOOTNOTES. Includes sections for 12-VOLT INTIMIDATOR®, 12-VOLT ULTIMATE®, and 12-VOLT GOLD technologies.

GROUP NO.	PART NO.	PERFORMANCE LEVEL		WEIGHT		LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MONTHS	FOOTNOTES			
		CCA	10 HR CAPACITY	lb	kg	in	mm	in	mm	in	mm						
POWER SPORTS AGM VALVE REGULATED																	
	ETX9	120	8	7.5	3.4	5-7/8	150	3-7/16	88	4-3/16	106	0.2	12	2,38,39			
	ETX12	180	10	10	4.5	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	2,38,39			
	ETX14	220	12	11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	2,38,39,42,75			
	ETX14L	220	12	11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	2,38,39			
	ETX15	220	14	11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	2,38,39,42,76			
	ETX15L	220	14	11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	2,38,39			
	ETX16	325	19	17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	2,38,39,42,74			
	ETX16L	325	19	17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	2,38,39,42,74			
	ETX18L	340	20	18	8.2	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	2,38,39			
	ETX20L	310	17.5	15	6.8	6-7/8	175	3-7/16	88	6-1/8	155	0.2	12	2,38,39			
	ETX30L	400	26	21.5	9.8	6-5/8	168	5-3/16	131	6-7/8	175	0.2	12	2,38,39			
	ETX30LA	400	26	21.5	9.8	6-5/8	168	5-3/16	131	7-3/4	197	0.2	12	2,38,39,78			
GROUP NO.	PART NO.	PERFORMANCE LEVEL				VOLTS	WEIGHT (lb)		LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MONTHS	FOOTNOTES
		CCA	R.C.	REF. CA	DRY		in	mm	in	mm	in	mm					
DRY CHARGED																	
24	624MFD	650	115	800	12	26	10-3/4	273	6-3/4	171	9	229	1.0	24	23,45		
8D	908DY	1400	430	1720	12	80	20-3/4	527	11	279	10	254	4.0	12	12,17,23,25		
31	1231MFD	1000	185	1230	12	43	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,23,X		
U1	8U1LD	230	—	285	12	10.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	8,22,23,Z		
U1R	8U1RD	230	—	285	12	10.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	8,22,23,Y		
GROUP NO.	PART NO.	PERFORMANCE LEVEL				VOLTS	WEIGHT (lb)		LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MONTHS	FOOTNOTES
		CCA	R.C.	20 HR CAP	DRY		in	mm	in	mm	in	mm					
DRY CHARGED ORDNANCE																	
2HN	2HND	400	75	45	12	25	10-1/4	260	5-1/4	133	9	229	1.0	6	12,21,25,32		
4HN	4HND	235	28	21	24	27.5	10-1/4	260	5-1/4	133	9	229	1.0	6	11,17,25,32		
6TL	6TMFD	750	230	120	12	52	11-1/4	286	10-1/2	267	9	229	2.0	6	6,17,21,25		

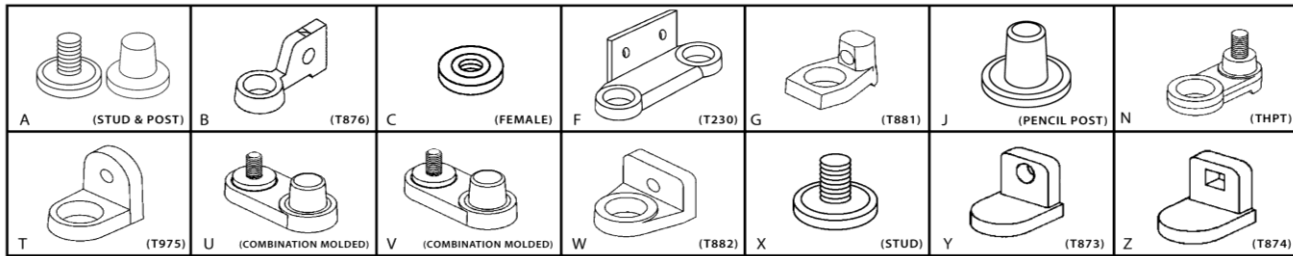

- A. Flush combination terminal w/ 5/16" stud and SAE Post, hex nuts included
- B. Flag terminal w/ 3/8" diameter hole (T876)
- C. 1/4" - 20 Copper Insert Terminal
- F. Double Wide L Terminal w/ two 3/8" holes (T230)
- G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
- J. JIS Terminal "pencil post"
- N. Vertical stainless steel 5/16"- 18 stud (THPT)
- T. Heavy Duty L terminal w/ 3/8" diameter hole (T975)
- U. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs & hex nuts
- V. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs
- W. "L" type terminal w/ 5/16" diameter hole (T882)
- X. 3/8" - 16 stainless steel stud posts
- Y. Small L terminal with round hole
- Z. Small L terminal with square hole

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in polypropylene cases & covers, except where noted
- Batteries manufactured in black cases & covers, except where noted
- SAE & DIN automotive posts used, unless noted (Excludes Power Sports)
- Warranty is suggested months
- Weights are approximates
- CA and MCA ratings @ 32°F are approximations for comparison only
- Ratings except CCA and RC, are "nominal"
- CCA and RC ratings conform to B.C.I. specifications
- CCA on 8 Volt Marine & Industrial types for reference only

FOOTNOTES

2. Black cover / Gray case
4. Gray cover / Gray case
6. Black cover / Brown case
8. Black cover / White case
11. Low maintenance-low antimony grids
12. Hybrid construction
13. Absorbed Glass Mat technology (AGM)
14. Centerline terminal posts
15. Hard rubber, one-piece cover construction
16. Dual terminal, universal design
17. Includes handle
18. Includes top adapter
19. Includes lifting ledges
20. Hard rubber, multi-cell cover construction
21. Anchor locked elements
22. Flush manifold vented cover

23. Up to 10% reduced capacity
25. With individual vent caps
26. Venting Elbow Supplied
32. Available dry charged only
33. Fahrenheit Thermal Shielding Technology
34. Ratings after 15 cycles
35. Deduct 15% from CCA and CA to allow for double insulation (glass mat)
36. Peak performance capacity
37. For height with adapter add 7/8" (22mm)
38. "Non-spillable" as defined by DOT (Department of Transportation) definitions
39. "Non-spillable" as defined by ICAO (International Civil Aviation Organization) and IATA (International Air Transport Association) definitions
42. Height without adapter
43. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
44. Free replacement warranty is 3 months in full electric vehicle use
45. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 6 months and 3 months in full electric vehicle use
46. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 18 months, free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
74. Shipped with 20mm height adapter
75. Shipped with two 17mm height adapters
76. Shipped with 10mm height adapter
78. Shipped with 22mm height adapter